


Product Specification

10/100/1000M Unmanaged Industrial Ethernet Switches,MINI type (FLD-S-1G1G-IM)

Introduction	Image
<p><i>This industrial media converter FLD-S-1G1G-IM is specially designed for industrial application, which provides fast and stable media conversion . It also meets the requirements of long distance, high speed, and wide broadcast.</i></p> <p><i>With wide range operation temperature, alloy aluminum shell and other excellent industrial-grade design against vibration and shock, it could keep your industrial automation applications running continuously in different harsh environments.</i></p>	

Features & Benefits
❖ 1 10/100/1000Base-T(X) port and 1 1000Base-SX/LX/LH/ZX fiber port
❖ 10/100/1000M auto-negotiation , Full/Half duplex mode, auto-MDI-MDI-X
❖ Super lightning protection, IP40 protection
❖ Excellent heat elimination without cooling fan
❖ Redundant dual DC power inputs
❖ -40℃-85℃ operating temperature range

Switch Properties
❖ MAC Table Size: 8K
❖ Packet Buffer Size: 1Mbit
❖ Processing Type: Store and Forward
❖ Exchange Properties: 1488000pps (1000M)

Physical Characteristics

- ❖ *Housing: Aluminum Alloy material with IP40 Protection*
- ❖ *Dimension: 98mm(L) X 78mm(W) X 32mm(H)*
- ❖ *Weight: 270g*
- ❖ *Installation: Din-Rail mounting, Wall mounting*

Interfaces

- ❖ *1 RJ45 Port*
 - *Comply with IEEE802.3, IEEE802.3u, IEEE802.3ab, 10/100/1000Base-T(X)*
 - *10/100/1000Base-T(X) auto negotiation speed*
 - *Full/Half duplex mode*
 - *Auto MDI-MDI-X connection*
 - *Up to 100M Cat-5 transmission distance*

- ❖ *1 Fiber Port*
 - *Comply with IEEE802.3z*
 - *Rate: 1000Mbps*
 - *Wavelength: 850nm/1310nm/1550nm*
 - *Up to 550M transmission distance with multi-mode*
 - *Up to 20km,40km,60km,80km transmission distance with single-mode*
 - *SC/LC interfaces optional*

Power

- ❖ *Input Voltage: 24V DC(6-36VDC), Redundant dual inputs*
- ❖ *Input Current: <0.5A @24VDC*
- ❖ *Overload Current Protection: Present*
- ❖ *Reverse Polarity Protection: Present*
- ❖ *Redundant Protection: Present*
- ❖ *Connection: 1 removable 6-pin terminal blocks*


Environmental Limits

- ❖ *Operating Temperature: -40℃-85℃*
- ❖ *Storage Temperature: -40℃-85℃*
- ❖ *Ambient Relative Humidity: 5%-95% (non-condensing)*

Standards	
❖	Safety: UL 60950-1
❖	EMS: <ul style="list-style-type: none"> ➤ EN61000-4-2 (ESD), Level 3 ➤ EN61000-4-3 (RS), Level 3 ➤ EN61000-4-4 (EFT), Level 3 ➤ EN61000-4-5 (Surge), Level 3 ➤ EN61000-4-6 (CS), Level 3
❖	Shock: IEC 60068-2-27
❖	Free Fall: IEC 60068-2-32
❖	Vibration: IEC 60068-2-6
❖	EMI: FCC Part 15 Subpart B Class A, EN 55022 Class A
❖	Industry: IEC61000-6-2
❖	Rail: EN50155, EN50121-4
❖	Traffic: NEMA TS-2

Warranty	
5 years	

Dimension : FLD-S-1G1G-IM

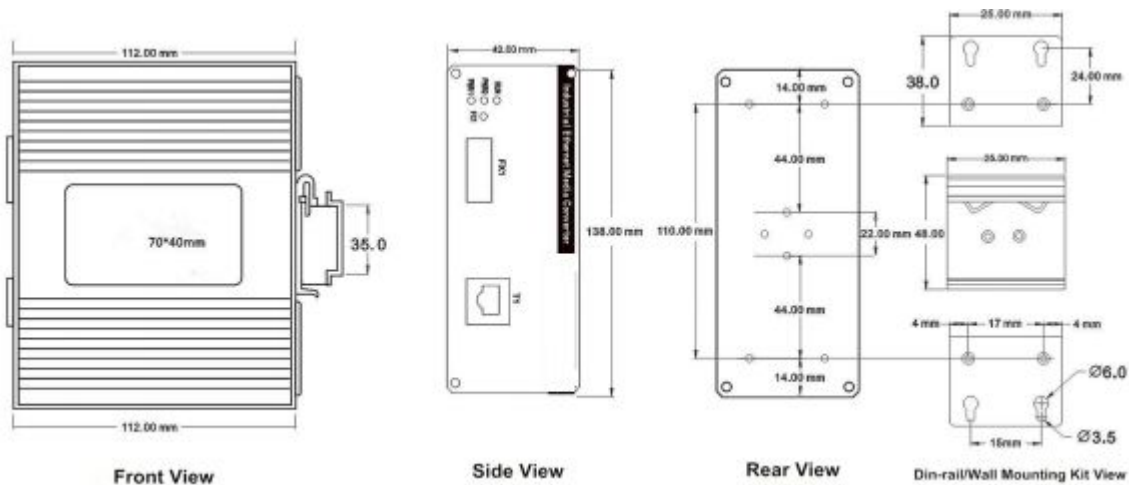

Contact :

Address	6 th floor ,building 8,Zhongxing industrial zone,Nanshan district,Shenzhen,P.R.China
Zip	518000
Website	www.fiberlandtec.com
Email	sales@fiberlandtec.com